
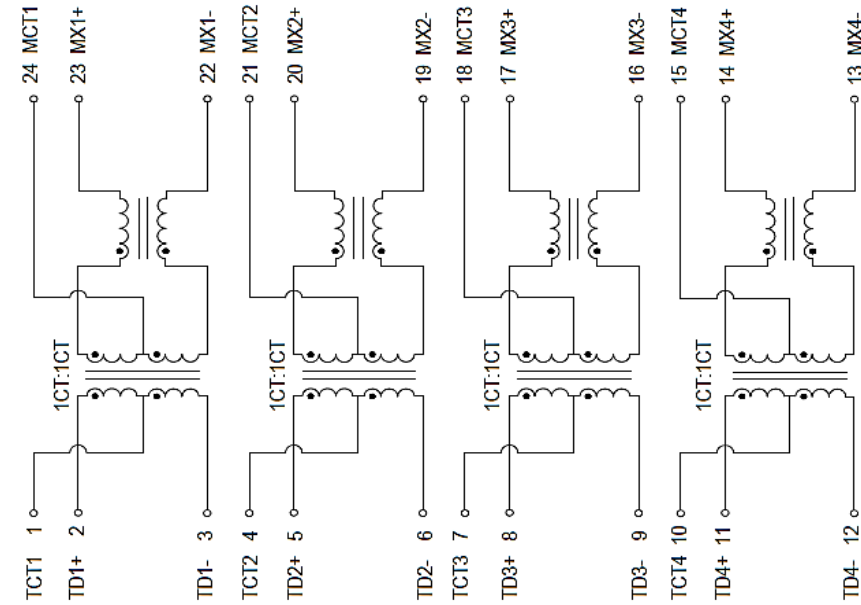


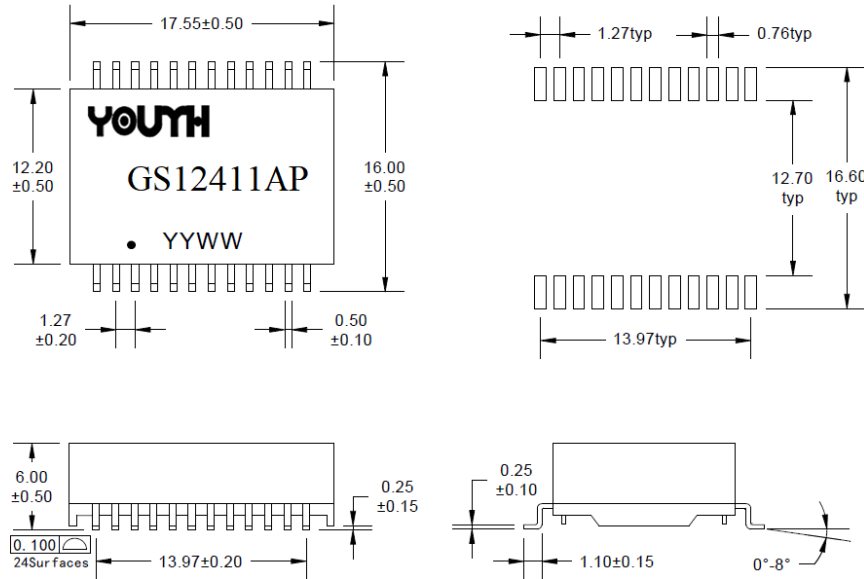

Turns Ratio	OCL (uH Min.)	LK (uH Max.)	DCR (mΩ Max.)	
(CT:CT±5%)	100KHz/0.1V@8mA DC-Bias	@100KHz/0.1V		
1:1	350	0.5	1400	
Insertion Loss (dB Max.)	Return Loss (dB Min.)		Crosstalk (dB Typ.)	CMMR (dB Typ.)
1-100 MHz	1-40 MHz	40-100 MHz	1-100 MHz	1-100 MHz
-0.2-0.002*f ^{1.4}	-16	-10+20*log (f/80)	-30	-30

- Isolation Hi-pot: 1500VAC 1mA 60S
- Operating Temperature: 0°C to +70°C
- Storage Temperature: -40°C to +85°C
- IEEE802.3at compliant performance---720mA Current Capability