



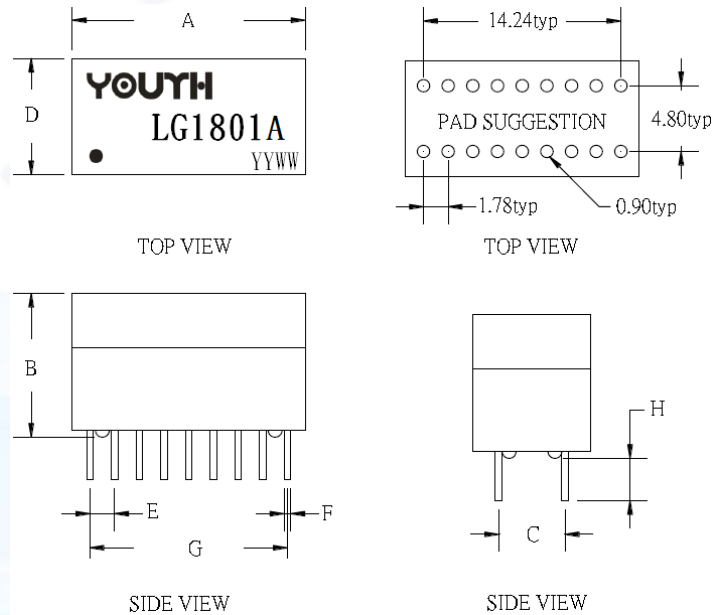

A	16.80 ± 0.25	mm
B	10.90 ± 1.00	mm
C	4.80 ± 0.20	mm
D	8.30 ± 0.25	mm
E	1.78 ± 0.20	mm
F	0.50 ± 0.10	mm
G	14.24 ± 0.20	mm
H	3.20 ± 0.50	mm

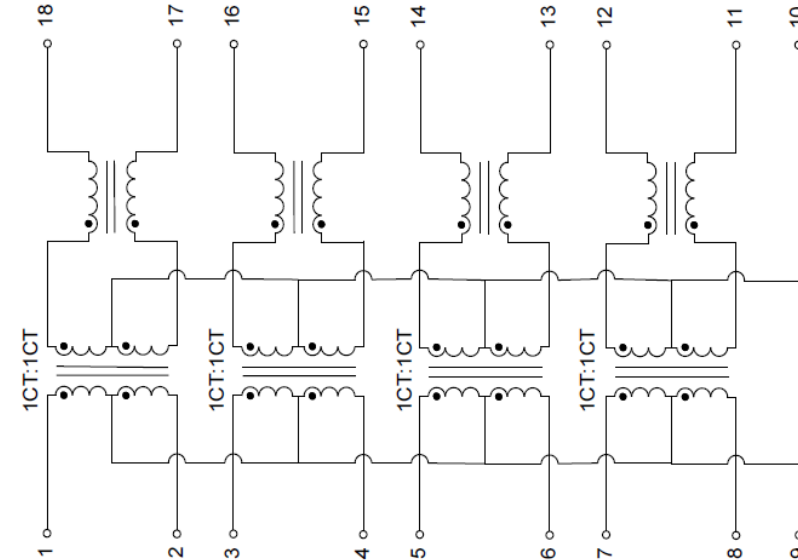

Turns Ratio		OCL (uH Min.)		LK (uH Max.)		DCR (mΩ Max.)	
(CT:CT±5%)		100KHz/0.1V@8mA DC-Bias		@100KHz/0.1V			
1:1		350		0.6		1500	
Insertion Loss (dB Max.)	Return Loss (dB Min.)					Crosstalk (dB Typ.)	CMMR (dB Typ.)
1-100 MHz	1-30 MHz	40 MHz	50 MHz	60-80 MHz	80-100 MHz	1-100 MHz	1-100 MHz
-2.0	-15	-10	-10	-10	-5	-25	-25

- Isolation Hi-pot: 1500VAC 1mA 60S
- Operating Temperature: 0°C to +70°C
- Storage Temperature: -40°C to +85°C
- IEEE802.3at compliant performance---720mA Current Capability