


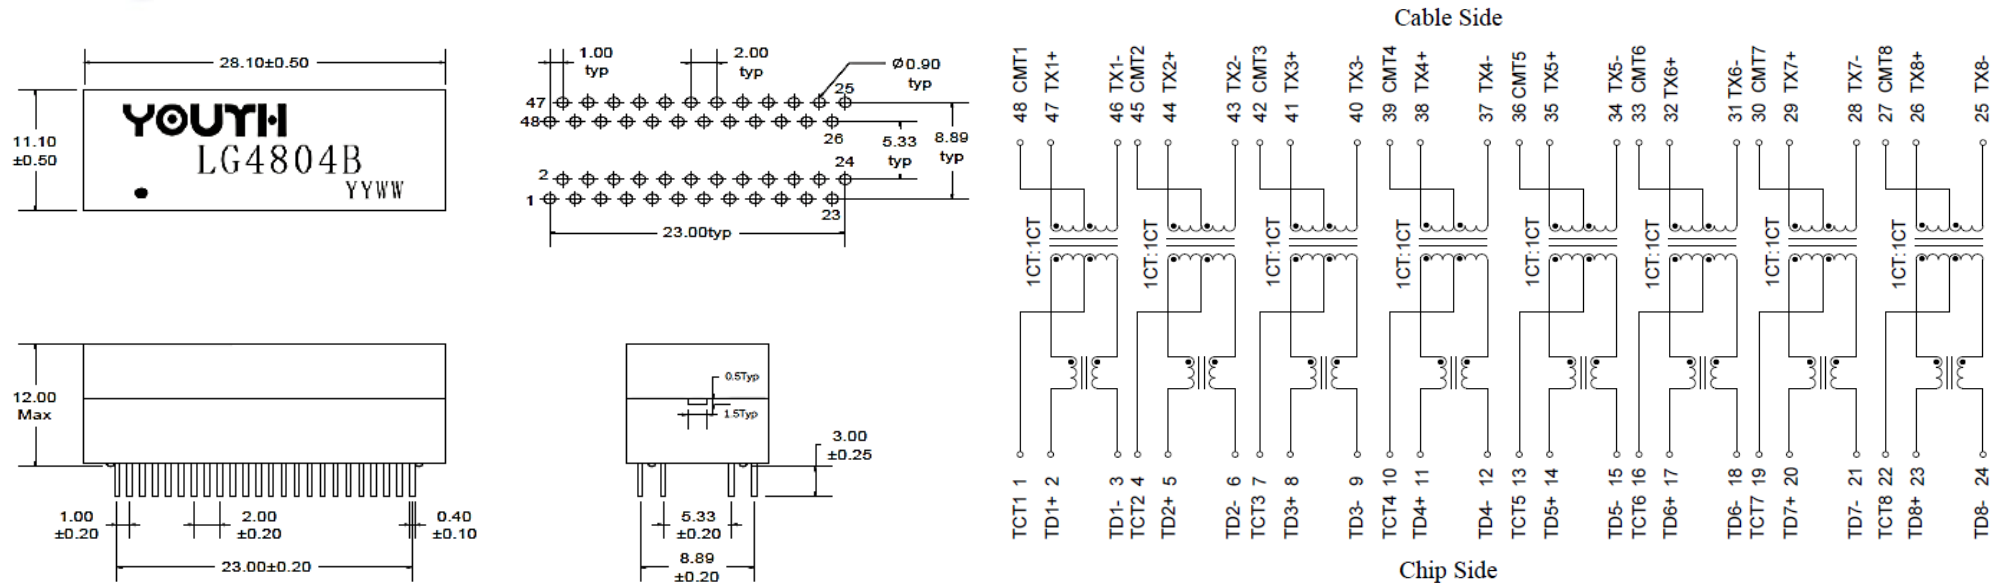

Turns Ratio		OCL (uH Min.)		LK (uH Max.)		DCR (mΩ Max.)	
(CT:CT±5%)		100KHz/0.1V@8mA DC-Bias		@100KHz/0.1V			
1:1		350		0.5		1400	
Insertion Loss (dB Max.)	Return Loss (dB Min.)					Crosstalk (dB Typ.)	CMMR (dB Typ.)
1-100 MHz	1-30 MHz	40 MHz	50 MHz	60-80 MHz	80-100 MHz	1-100 MHz	1-100 MHz
-1.1	-18	-14.4	-13.1	-12	-10	-30	-30

- Isolation Hi-pot: 1500VAC 1mA 60S
- Operating Temperature: 0°C to +70°C
- Storage Temperature: -40°C to +85°C
- IEEE802.3at compliant performance---720mA Current Capability