
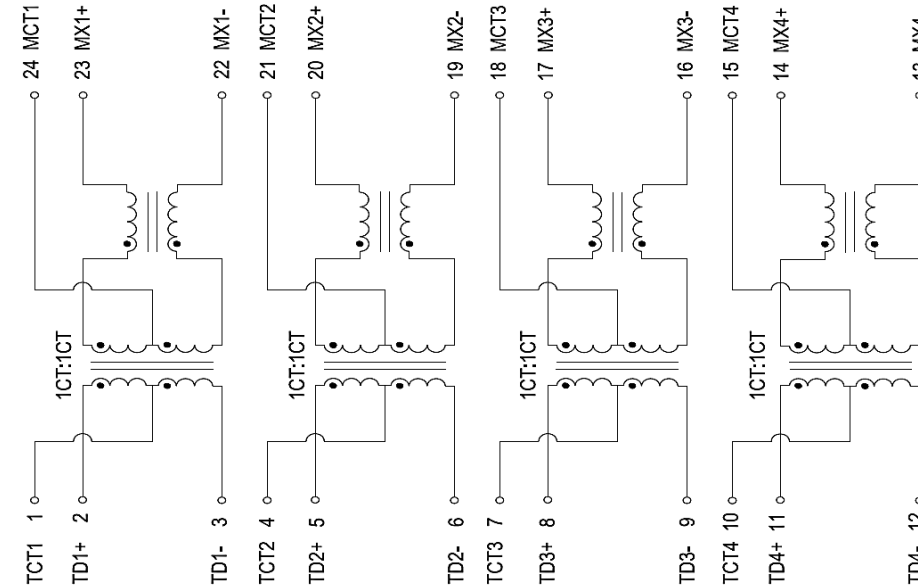


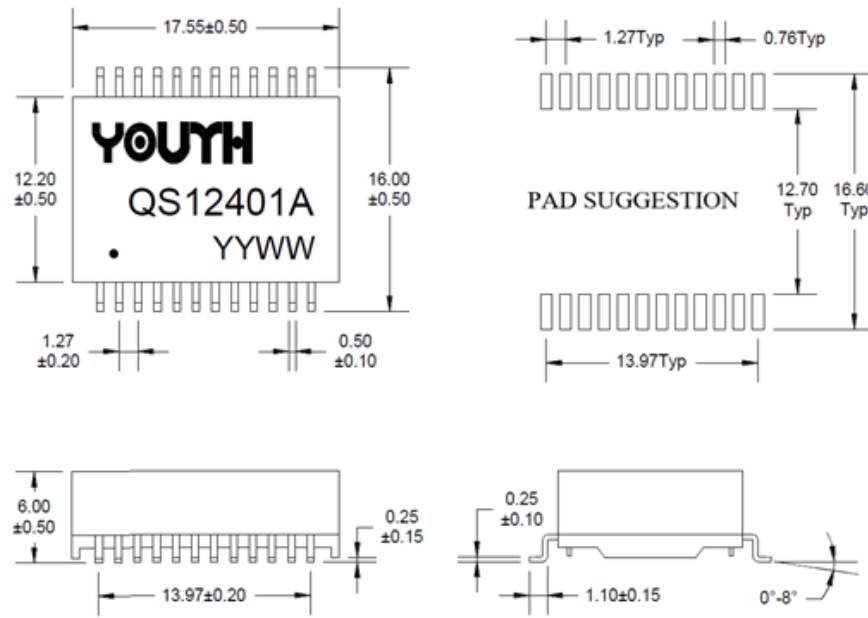

Turns Ratio		OCL (uH Min.)	LK (uH Max.)	DCR (mΩ Max.)	
(CT:CT±5%)		@100KHz/0.1V	@100KHz/0.1V		
1:1		200	0.5	1000	
Insertion Loss (dB Max.)		Return Loss (dB Min.)		Crosstalk (dB Typ.)	CMMR (dB Typ.)
1-100 MHz	100-250 MHz	$1 \leq f \leq 40$ MHz	$40 < f \leq 250$ MHz	1-250 MHz	1-250 MHz
-1.0	-2.0	-16	$-16 + 10 \log(f/40)$	-30	-30

- Isolation Hi-pot: 1500VAC 1mA 60S
- Operating Temperature: 0°C to +70°C
- Storage Temperature: -40°C to +85°C