
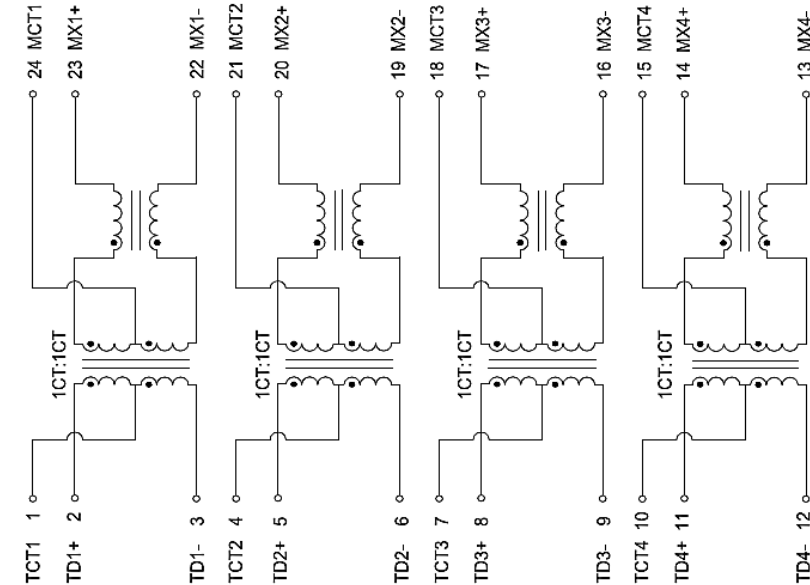


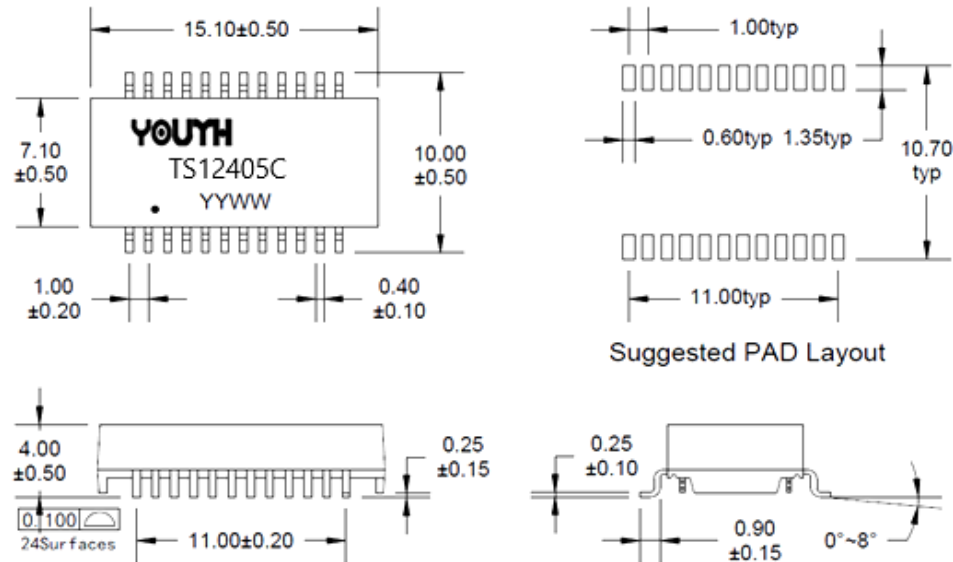

Turns Ratio				OCL (uH Min.)		LK (uH Max.)			DCR (mΩ Max.)	
(CT:CT±5%)				@100KHz/0.1V		@100KHz/0.1V				
1:1				120		0.5			900	
Insertion Loss (dB Max.)				Return Loss (dB Min.)					Crosstalk (dB Typ.)	CMMR (dB Typ.)
1-200 MHz	200-300 MHz	300-400 MHz	400-500 MHz	1-100 MHz	100-200 MHz	200-300 MHz	300-400 MHz	400-500 MHz	1-500 MHz	1-500 MHz
-1.2	-1.5	-2.0	-3.0	-18	-16	-12	-10	-8	-25	-20

- Isolation Hi-pot: 1500VAC 1mA 60S
- Operating Temperature: 0°C to +70°C
- Storage Temperature: -40°C to +85°C