


Features

- Impedance 75Ω
- Suitable for DOCSIS 4.0 (100~700 MHz)
- 1CT:1 Impedance ratio
- 260°C reflow compatible
- RoHS compliant, lead free

RF Power(Average)	23dBm Typ.
RF Power(Peak)	37dBm Typ.
Insertion loss	-1.0dB Max.
Return loss	-18dB Min.
CMRR up to 700 MHz	-28dB Min.
Operating Temperature	-40°C to +85°C
Storage Time Limited	12 Months From Shipping

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	CMRR (dB)
100-700MHz	-1.0(Max.)	-18.0(Min.)	-28(Min.)

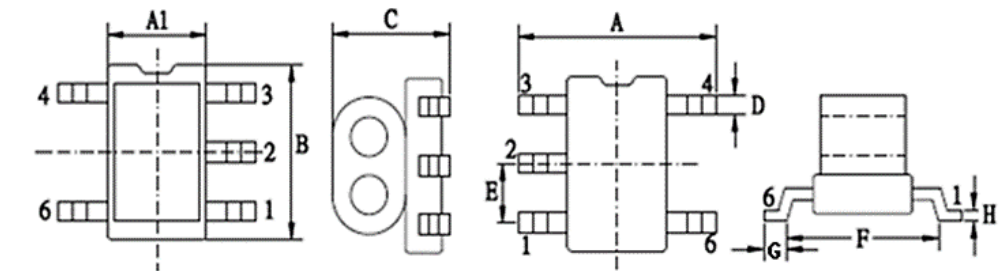

A	A1	B	C	D	E	F	G	H
5.4±0.3	2.7±0.2	4.15±0.3	3.5Max.	0.5Ref.	1.5±0.2	4.15Ref.	0.625Ref.	0.3Ref.

