


Features

- Impedance 75Ω
- Suitable for DOCSIS 3.1 & 4.0 (5~204MHz)
- 1CT:1 Impedance ratio
- 260°C reflow compatible
- RoHS compliant, lead free

RF Power	33dBm Typ.
Insertion loss	-2.0dB Max.
Return loss	-15dB Min.
DC current:	30mA
Operating Temperature	-40°C to +85°C
Storage Time Limited	12 Months From Shipping

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
5-204MHz	-2.0(Max.)	-15.0(Min.)

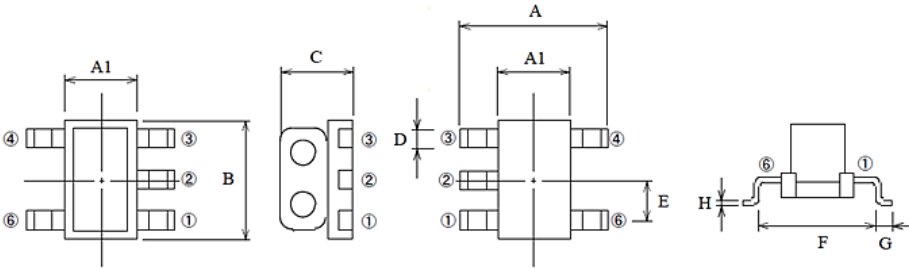

A	A1	B	C	D	E	F	G	H
4.8±0.3	2.7±0.2	3.8±0.3	3.2±0.3	0.5±0.1	1.27±0.2	4.0Ref.	0.4Ref.	0.3Ref.

