


Features

- Impedance 75Ω
- Suitable for 1:1, Transmission Line Balun (5-3000MHz)
- 260°C reflow compatible
- RoHS compliant, lead free

RF Power(Average)	250mW
DC Current	350mA Max.
Operating Temperature	- 40°C to +85°C
Storage Time Limited	12 Months From Shipping
Pin Flatness	0.1mm Max.

Parameter	Test Conditions	Units	Min	Typ.	Max.
INSERTION LOSS	2000MHz~3000MHz	dB	--	--	3
	1200MHz~2000MHz		--	--	2
	5MHz~1200MHz		--	--	1
PHASE UNBALANCE	3 Bandwidth	Degree	--	1	--
	4 Bandwidth		--	2	--
AMPLITUDE UNBALANCE	0.3	dB	--	1	--
	1.0		--	2	--

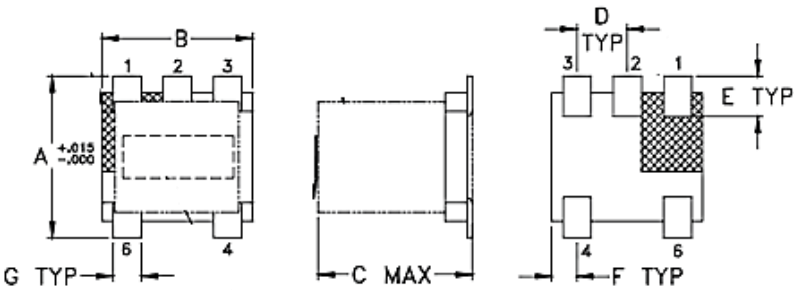

A	B	C	D	E	F
3.81±0.15	3.81±0.15	2.31±0.15	1.27 Typ.	1.02 Typ.	0.64 Typ.

