


Features

- Impedance 75Ω
- Suitable for 1:1, Transmission Line Balun (4.5-3000MHz)
- 260°C reflow compatible
- RoHS compliant, lead free

RF Power(Average)	250mW
DC Current	350mA Max.
Operating Temperature	- 40°C to +85°C
Storage Time Limited	12 Months From Shipping
Pin Flatness	0.1mm Max.

Parameter	Test Frequency	Units	Min	Typ.	Max.
Insertion Loss	4.5MHz~1000MHz	dB	--	0.32	1.0
	1000MHz~2000MHz			--	2.0
	2000MHz~3000MHz			--	3.5
Amplitude Unbalance	4.5MHz~1000MHz	dB	--	--	1.0
Phase Unbalance	4.5MHz~1000MHz	Degrees	--	--	20

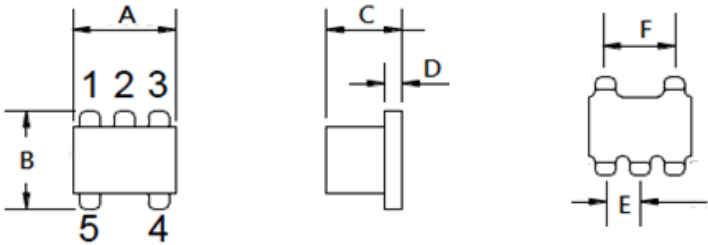

A	B	C	D	E	F
3.81±0.15	3.81±0.15	2.6±0.15	0.64±0.15	1.27±0.1	2.54±0.1

Secondary Dot	1
Secondary CT	2
Secondary	3
Pimary	4
Pimary Dot	5

