


Features

- All test data is referenced to 25 °C ambient
- Rated Current: DC current that will cause an approximate ΔT of 40°C
- Operating temperature range: - 40 °C to + 125 °C
- Storage temperature range: - 40°C to + 85°C.
- Moisture sensitivity level (MSL) 1

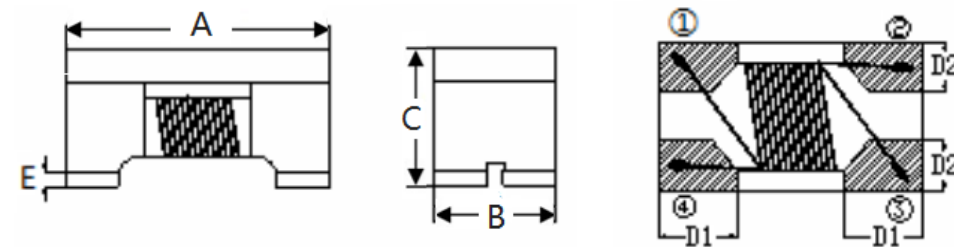

Part Number	Impedance @100MHz (Ω) $\pm 25\%$ (Common Mode)	DCR (Ω) Max.	Rated Current (mA) Max.	Rated Voltage (V)	Insulation Resistance (M Ω) Min.
YFD1608DT-220	22	0.11	500	20	10
YFD1608DT-900	90	0.25	300	20	10

A	B	C	D1	D2	E
1.6 ± 0.1	0.8 ± 0.1	1.1 ± 0.1	0.33 Typ.	0.25 Typ.	0.1 Max.

