


Features

- All test data is referenced to 25 °C ambient
- Rated Current: DC current (A) that will cause an approximate ΔT of 40 °C
- Operating temperature range: - 40 °C to + 125 °C
- Storage temperature range: - 40 °C to + 85 °C, 75% RH max.
- Storage time limited: 12 Months From Shipping

INDUCTANCE (μ H) $\pm 50\%$ (at 10KHz/50mV)	DC RESISTANCE (m Ω) Max.	RATED CURRENT (A) Max.	RATED VOLTAGE (V) Max.	Hi-Pot	TURNS RATIO
2500	75	0.9	125	500VAC /3mA/3S	1:1

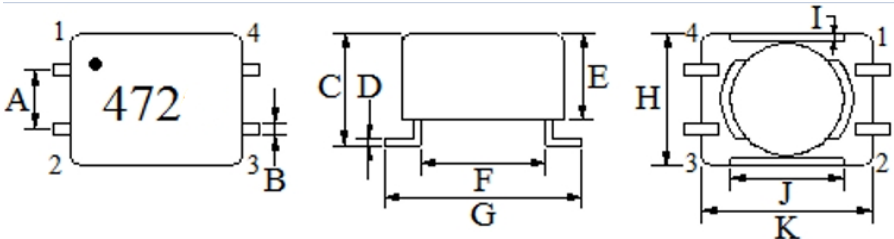

A	B	C	D	E	F	G
2.54 $\pm$ 0.2	0.5 $\pm$ 0.1	4.5 $\pm$ 0.5	0.3 $\pm$ 0.1	3.7 $\pm$ 0.2	5.5 $\pm$ 0.2	8.9 $\pm$ 0.3

