


Features

- All test data is referenced to 25 °C ambient
- Rated Current: DC current (A) that will cause an approximate ΔT of 40 °C
- Operating temperature range: - 40 °C to + 125 °C
- Storage temperature range: - 40 °C to + 125 °C, 75% RH max.
- Storage time limited: 12 Months From Shipping

IMPEDANCE (Ω) @100MHz		DC RESISTANCE (m Ω) Max.	RATED CURRENT (A) Max.	INSULATION RESISTANCE (M Ω) Min.	RATED VOLTAGE (V) Max.	TURNS RATIO
Min.	Typ.					
2000	2700	63	1.0	10	125	1:1

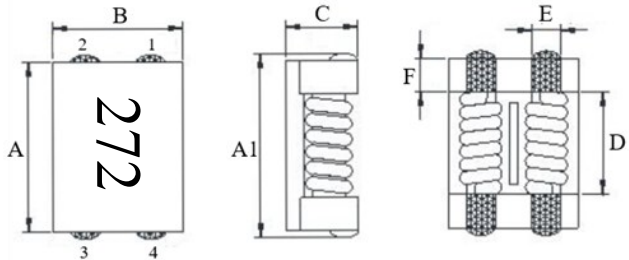

A	A1	B	C	D	E	F
7.0 $\pm$ 0.5	7.5 $\pm$ 0.5	6.0 $\pm$ 0.5	3.8Max.	3.5Typ.	1.5Typ.	1.7Typ.

